

80x80x25mm **LK8025**
PARAMETER
Bearings: Sleeve or ball bearings


Material: PBT 7 fan blade

Motor life: 30,000h (Sleeve) / 50,000h (ball)

Insulation level: Class A

Working temperature: -20~60°C


Weight: 72g

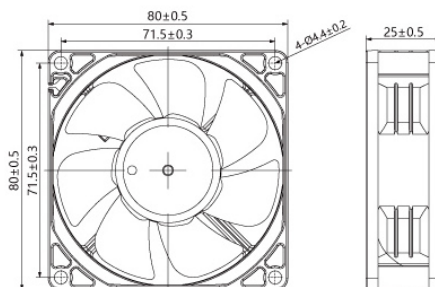DIMENSION (mm)


Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK8025L12B	12	0.08	0.96	2500	26.67	29.2
LK8025L24B	24	0.04	0.96			
LK8025M12B	12	0.13	1.56	3000	33.46	33.5
LK8025M24B	24	0.07	1.68			
LK8025H12B	12	0.25	3.00	4000	44.05	41.2
LK8025H24B	24	0.12	2.88			
LK8025H48B	48	0.06	2.88			



Air Performance

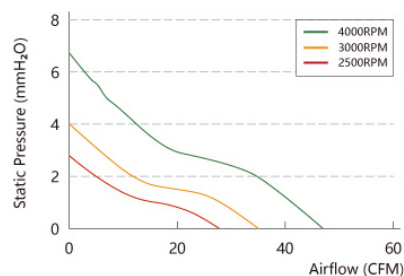
80x80x38mm **LK8038-HP**
PARAMETER
Bearings: Sleeve or ball bearings


Material: PBT 7 fan blade

Motor life: 30,000h (Sleeve) / 50,000h (ball)

Insulation level: Class A

Working temperature: -20~60°C

Weight: 177.6g

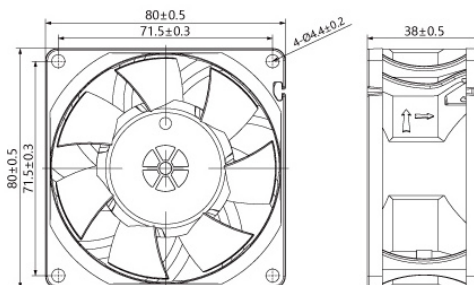
DIMENSION (mm)


Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK8038L12B-HP	12	0.24	2.88	4000	46.54	48.5
LK8038L24B-HP	24	0.12	2.88			
LK8038L48B-HP	48	0.07	3.36			
LK8038M12B-HP	12	0.80	9.60	6000	69.81	58.2
LK8038M24B-HP	24	0.40	9.60			
LK8038M48B-HP	48	0.20	9.60			
LK8038H12B-HP	12	1.80	21.60	8000	102.23	65.8
LK8038H24B-HP	24	0.90	21.60			
LK8038H48B-HP	48	0.45	21.60			

High Pressure series



Air Performance

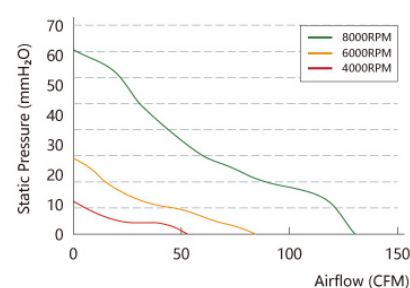


LK9225 92x92x25mm




PARAMETER

Bearings: Sleeve or ball bearings
Material: PBT 7 fan blade
Motor life: 30,000h (Sleeve) / 50,000h (ball)
Insulation level: Class A
Working temperature: -20~60°C
Weight: 102g

DIMENSION (mm)

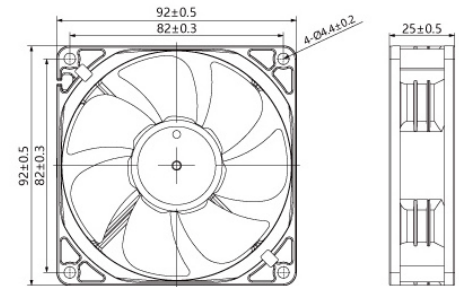

Air Performance

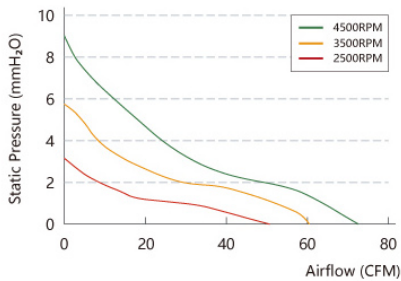

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK9225L12B	12	0.13	1.56	2500	38.12	31.7
LK9225L24B	24	0.06	1.44			
LK9225L48B	48	0.04	1.92			
LK9225M12B	12	0.25	3.00	3500	53.3	38.5
LK9225M24B	24	0.12	2.88			
LK9225M48B	48	0.06	2.88			
LK9225H12B	12	0.52	6.24	4500	73.2	45.8
LK9225H24B	24	0.25	6.00			
LK9225H48B	48	0.13	6.24			


LK9238-HP 92x92x38mm



PARAMETER

Bearings: Sleeve or ball bearings
Material: PBT 7 fan blade
Motor life: 30,000h (Sleeve) / 50,000h (ball)
Insulation level: Class A
Working temperature: -20~60°C
Weight: 202g


DIMENSION (mm)

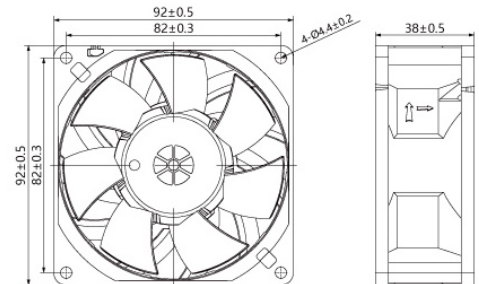

High Pressure series



Air Performance

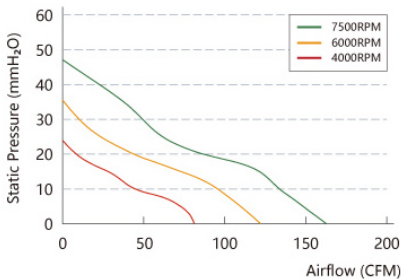

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK9238L12B-HP	12	0.27	3.24	4000	67.27	46.9
LK9238L24B-HP	24	0.15	3.60			
LK9238L48B-HP	48	0.08	3.84			
LK9238M12B-HP	12	0.90	10.80	6000	100.98	56.6
LK9238M24B-HP	24	0.50	12.00			
LK9238M48B-HP	48	0.25	12.00			
LK9238H12B-HP	12	1.80	21.60	7500	126.12	61.9
LK9238H24B-HP	24	0.90	21.60			
LK9238H48B-HP	48	0.45	21.60			

120x120x25mm **LK12025**

PARAMETER

Bearings: Ball bearings

Material: PBT 7 fan blade


Motor life: 50,000 h

Insulation level: Class A

Working temperature: -20~60°C

Weight: 121.3g


DIMENSION (mm)

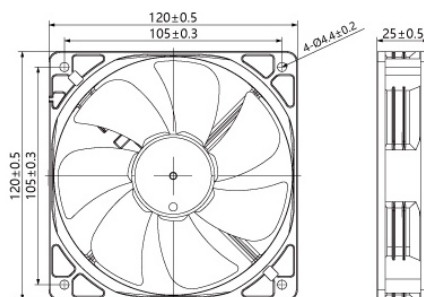

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK12025L12B	12	0.15	1.80	2000	60.23	37.1
LK12025L24B	24	0.09	2.16			
LK12025L48B	48	0.04	1.92			
LK12025M12B	12	0.27	3.24	2500	75.29	42.4
LK12025M24B	24	0.13	3.12			
LK12025M48B	48	0.07	3.36			
LK12025H12B	12	0.60	7.20	3500	105.4	50.5
LK12025H24B	24	0.30	7.20			
LK12025H48B	48	0.15	7.20			



Air Performance

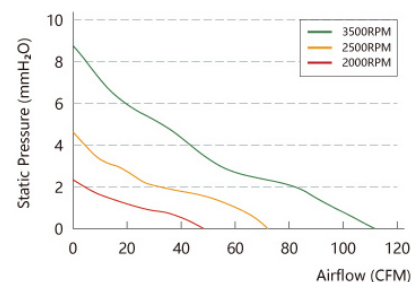
120x120x38mm **LK12038**

PARAMETER

Bearings: Ball bearings

Material: PBT 7 fan blade


Motor life: 50,000 h

Insulation level: Class A

Working temperature: -20~60°C

Weight: 301.5g


DIMENSION (mm)

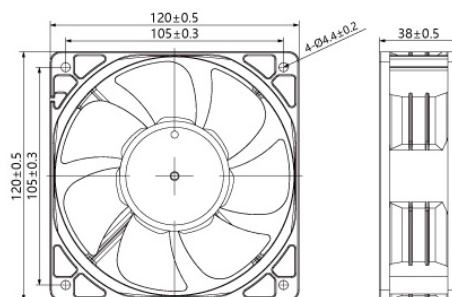

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK12038L12B	12	0.30	3.60	2500	95.54	41.8
LK12038L24B	24	0.12	2.88			
LK12038L48B	48	0.08	3.84			
LK12038M12B	12	0.70	8.40	3500	133.54	50.4
LK12038M24B	24	0.32	7.68			
LK12038M48B	48	0.18	8.64			
LK12038H12B	12	1.50	18.00	4500	171.7	56.4
LK12038H24B	24	0.70	16.80			
LK12038H48B	48	0.40	19.20			



Air Performance

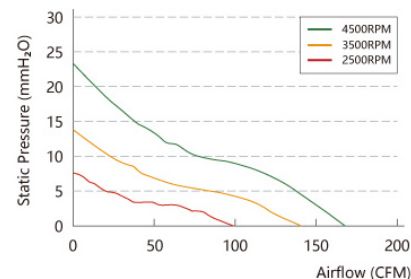


LK12038-HP 120x120x38mm


PARAMETER

Bearings: Ball bearings
Material: PBT 9 fan blade
Motor life: 50,000 h
Insulation level: Class A
Working temperature: -20~60°C
Weight: 301.5g


DIMENSION (mm)

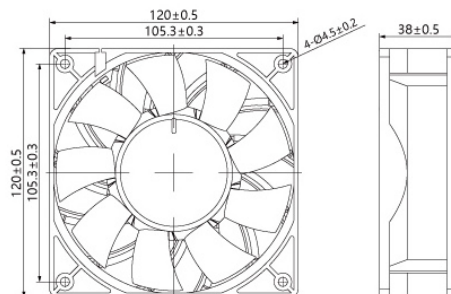

High Pressure series



Air Performance

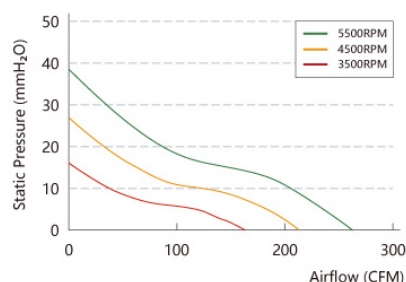


Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK12038L12B-HP	12	0.80	9.60	3500	155.64	55.6
LK12038L24B-HP	24	0.40	9.60			
LK12038L48B-HP	48	0.20	9.60			
LK12038M12B-HP	12	1.80	21.60	4500	200.15	63.6
LK12038M24B-HP	24	0.90	21.60			
LK12038M48B-HP	48	0.45	21.60			
LK12038H12B-HP	12	3.00	36.00	5500	244.57	68.4
LK12038H24B-HP	24	1.50	36.00			
LK12038H48B-HP	48	0.75	36.00			

LK15050 150x150x50mm



PARAMETER

Bearings: Ball bearings
Material: PBT 5 fan blade
Motor life: 50,000 h
Insulation level: Class A
Working temperature: -20~60°C
Weight: 700g

DIMENSION (mm)

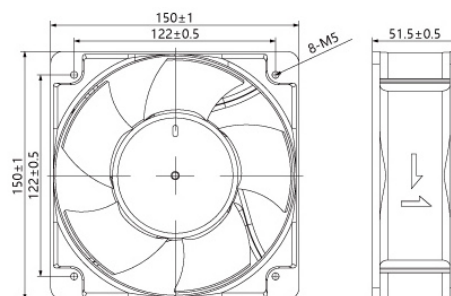

Air Performance

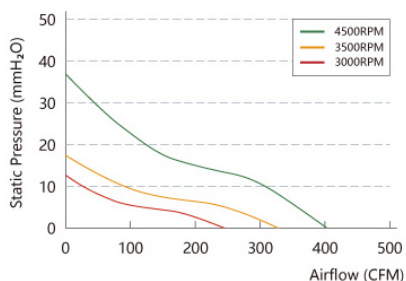

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK15050L12B	12	1.10	13.20	3000	220.94	56.7
LK15050L24B	24	0.52	12.48			
LK15050L48B	48	0.27	12.96			
LK15050M12B	12	1.70	20.40	3500	257.76	60.4
LK15050M24B	24	0.82	19.68			
LK15050M48B	48	0.40	19.20			
LK15050H12B	12	3.60	43.20	4500	331.41	66.4
LK15050H24B	24	1.74	41.76			
LK15050H48B	48	0.88	42.24			

172x150x51mm **LK17250**
PARAMETER
Bearings: Ball bearings


Material: PBT 5 fan blade

Motor life: 50,000 h

Insulation level: Class A

Working temperature: -20~60°C


Weight: 655g

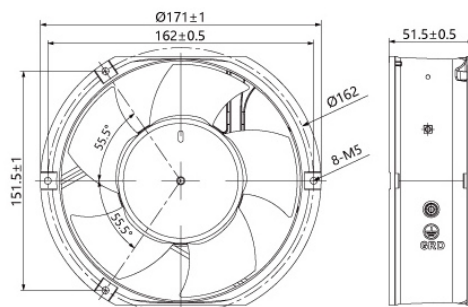DIMENSION (mm)


Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK17250L12B	12	1.20	14.40	3000	215.64	54.2
LK17250L24B	24	0.50	12.00			
LK17250L48B	48	0.30	14.40			
LK17250M12B	12	1.60	19.20	3500	238.33	57.8
LK17250M24B	24	0.80	19.20			
LK17250M48B	48	0.40	19.20			
LK17250H12B	12	3.50	42.00	4500	306.42	63.5
LK17250H24B	24	1.70	40.80			
LK17250H48B	48	0.90	43.20			



Air Performance

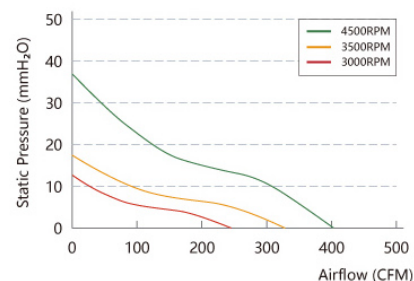
172x150x51mm **LK17250D**
PARAMETER
Bearings: Ball bearings


Material: PBT 7 fan blade

Motor life: 70,000 h


Insulation level: Class A

Working temperature: -30~70°C

Weight: 820g

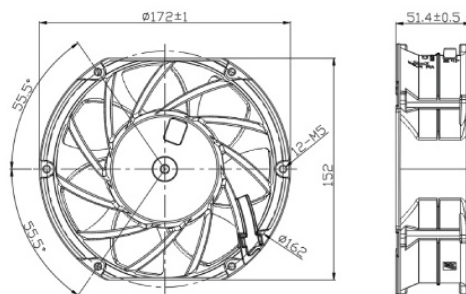DIMENSION (mm)


Air Performance

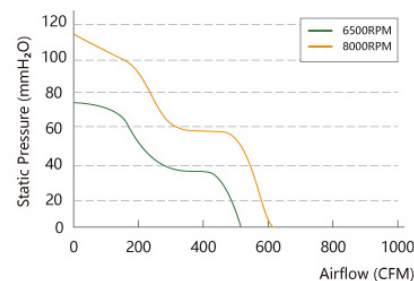


LK20060 200x200x60mm




PARAMETER

Bearings: Ball bearings
Material: PBT 5 fan blade
Motor life: 50,000 h
Insulation level: Class A
Working temperature: -20~60°C
Weight: 2400g

DIMENSION (mm)

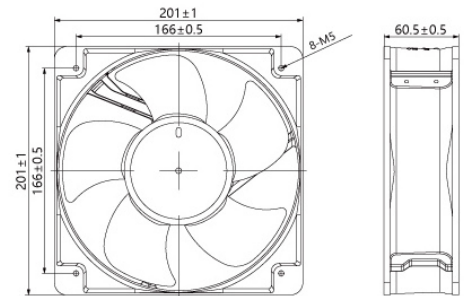

Air Performance

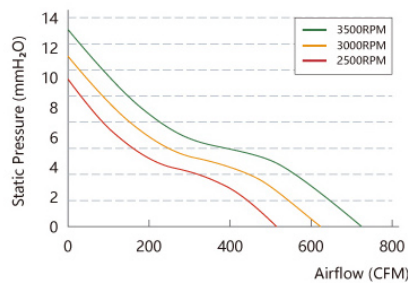

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK20060L12B	12	2.15	25.80	2500	380.17	57.7
LK20060L24B	24	1.00	24.00			
LK20060L48B	48	0.52	24.96			
LK20060M12B	12	3.60	43.20	3000	518.41	62.9
LK20060M24B	24	1.76	42.24			
LK20060M48B	48	0.90	43.20			
LK20060H12B	12	5.70	68.40	3500	532.24	65.7
LK20060H24B	24	2.80	67.20			
LK20060H48B	48	1.37	65.76			


LK20572 205x205x72mm




PARAMETER

Bearings: Ball bearings
Lead Wire: UL Type
Material: Impeller: Plastic; Frame: Aluminum Alloy
Insulation level: Class B
Working temperature: -10~70°C
Weight: 1800g

DIMENSION (mm)

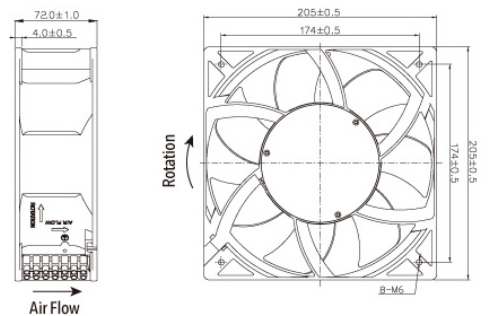

Air Performance

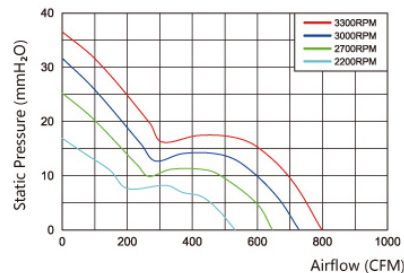

Model	Voltage (V)	Current (A)	Speed (RPM)	Air Pressure (mmH2O)	Air volume (CFM)	Noise (dB)
LK20572H12B	12	8.0	3000	31.7	728.4	59
LK20572H24B	24	5.0	3300	36.6	798.3	62
LK20572M24B	24	4.0	2700	25.2	646.3	57
LK20572L24B	24	3.0	2200	16.9	531.3	51
LK20572H48B	48	2.0	3300	36.6	798.3	62
LK20572M48B	48	1.50	2700	25.2	646.3	57
LK20572L48B	48	1.20	2200	16.9	531.3	51

220x60mm **LK22060**
PARAMETER
Bearings: Ball bearings


Lead Wire: UL Type

Material: Impeller: Plastic; Frame: Aluminum Alloy


Insulation level: Class B

Working temperature: -10~70°C

Weight: 1350g

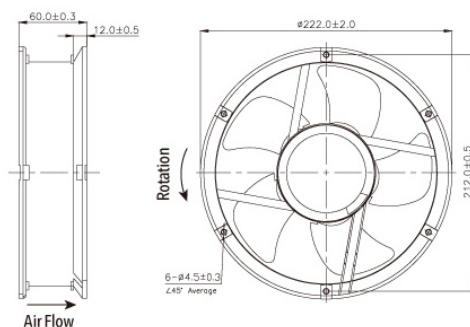DIMENSION (mm)


Model	Voltage (V)	Current (A)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air volume (CFM)	Noise (dB)
LK22060H12B	12	3.50	3000	19.7	581	55
LK22060M12B	12	2.80	2500	14.0	490.8	50
LK22060L12B	12	2.0	2000	9.9	396.7	44
LK22060H24B	24	2.0	3000	19.7	581.0	55
LK22060M24B	24	1.50	2500	14.0	490.8	50
LK22060L24B	24	1.0	2000	9.9	396.7	44
LK22060H48B	48	1.20	3000	19.7	581.0	55
LK22060M48B	48	0.80	2500	14.0	490.8	50
LK22060L48B	48	0.50	2000	9.9	396.7	44

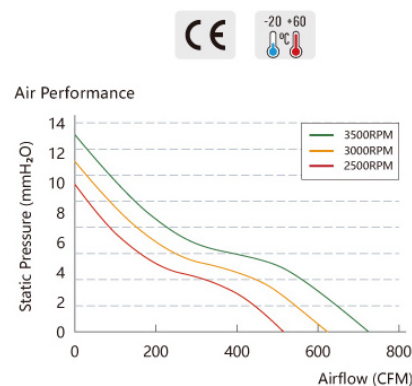
225x225x80mm **LK22580**
PARAMETER
Bearings: Ball bearings


Lead Wire: UL Type

Material: Impeller: Plastic; Frame: Aluminum Alloy


Insulation level: Class B

Working temperature: -10~70°C

Weight: 2000g

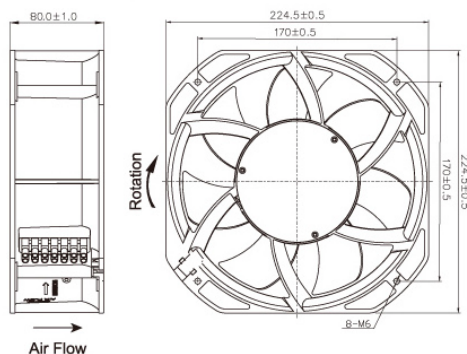DIMENSION (mm)


Model	Voltage (V)	Current (A)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air volume (CFM)	Noise (dB)
LK22580H12B	12	8.0	3000	32.2	730.8	58
LK22580H24B	24	5.0	3300	36.7	806.0	61
LK22580M24B	24	4.0	2700	25.4	656.5	55
LK22580L24B	24	3.0	2200	16.9	533.5	50
LK22580H48B	48	2.0	3300	36.7	806.0	61
LK22580M48B	48	1.50	2700	25.4	656.5	55
LK22580L48B	48	1.20	2200	16.9	533.5	50

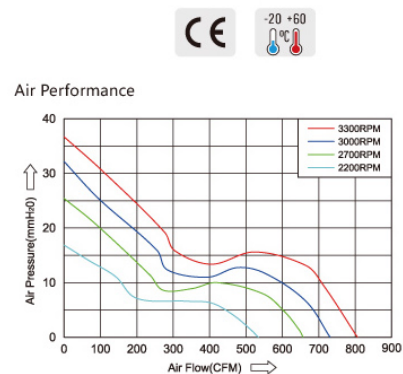

LK25489-7 254x89mm



PARAMETER

Bearings: Ball bearings

Lead Wire: UL Type


Material: Impeller: Plastic; Frame: Aluminum Alloy

Insulation level: Class B


Working temperature: -10~70°C

Weight: 2100g

DIMENSION (mm)

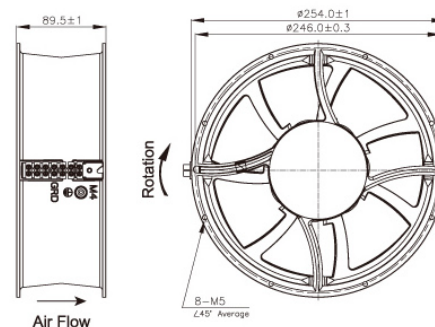

Air Performance

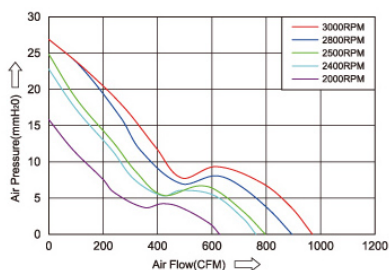

Model	Voltage (V)	Current (A)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air volume (CFM)	Noise (dB)
LK25489H12B-7	12	8.0	2500	24.8	796.7	55
LK25489H24B-7	24	4.0	2800	26.9	894.9	58
LK25489M24B-7	24	2.0	2400	22.8	762.2	53
LK25489L24B-7	24	0.80	2000	15.8	628.3	48
LK25489H48B-7	48	2.0	3000	26.9	970.1	59
LK25489M48B-7	48	1.0	2500	24.8	796.7	55
LK25489L48B-7	48	0.60	2000	15.8	628.3	48

LK28080 280x280x80mm



PARAMETER

Bearings: Ball bearings

Lead Wire: UL Type


Material: Impeller: Plastic; Frame: Aluminum Alloy

Insulation level: Class B


Working temperature: -10~70°C

Weight: 2400g

DIMENSION (mm)

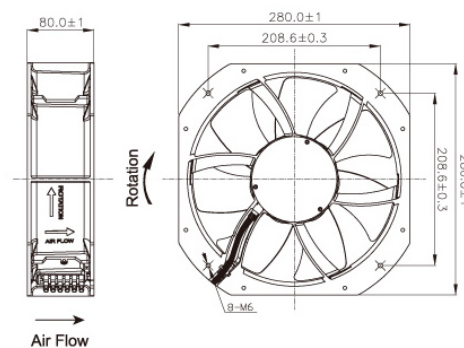

Air Performance

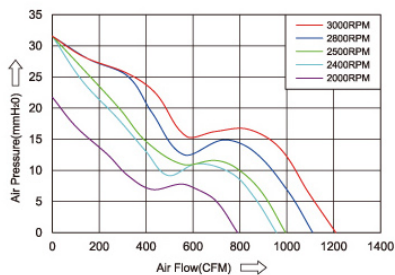

Model	Voltage (V)	Current (A)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LK28080H12B	12	8.0	2500	31.6	994.6	58
LK28080H24B	24	5.0	2800	31.6	1110.4	61
LK28080M24B	24	4.0	2400	31.6	955.5	57
LK28080L24B	24	3.0	2000	21.7	790.1	54
LK28080H48B	48	3.50	3000	31.6	1209.1	62
LK28080M48B	48	2.50	2500	31.6	994.6	58
LK28080L48B	48	1.20	2000	21.7	790.1	54