


LKE6025 60x60x25mm




Bearings: Ball bearings
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 85g

DIMENSION (mm)

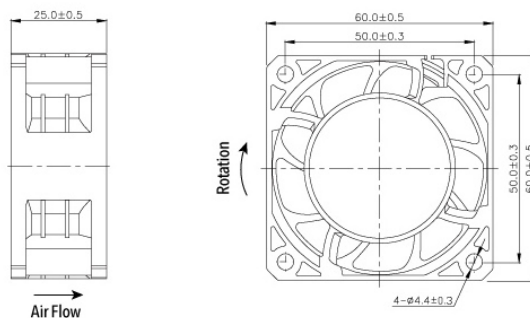

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE6025HB	110/240	0.09/0.06	50/60	90-265	6	8000	14.4	28.7	45
LKE6025MB	110/240	0.05/0.03			4	6000	7.9	20.6	32
LKE6025LB	110/240	0.03/0.02			2	4000	3.7	14.1	22

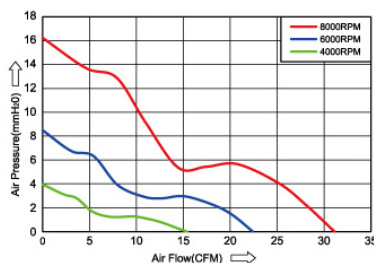


LKE7025 70x70x25mm




Bearings: Ball bearings
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 70g

DIMENSION (mm)

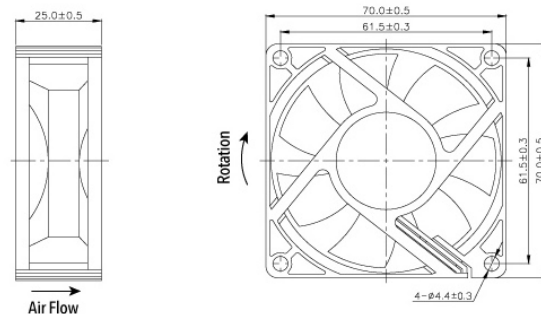


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE7025HX	110/240	0.10/0.05	50/60	90-265	4	3500	4.0	29.9	27
LKE7025MX	110/240	0.08/0.04			3	3000	2.6	24.5	21
LKE7025LX	110/240	0.06/0.03			2	2500	1.8	21.6	17

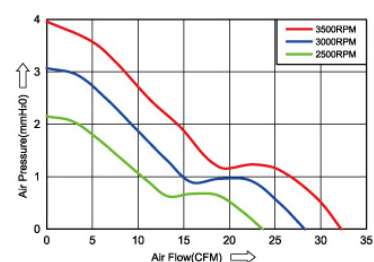

80x80x25mm LKE8025


Bearings: Ball bearings
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 76g

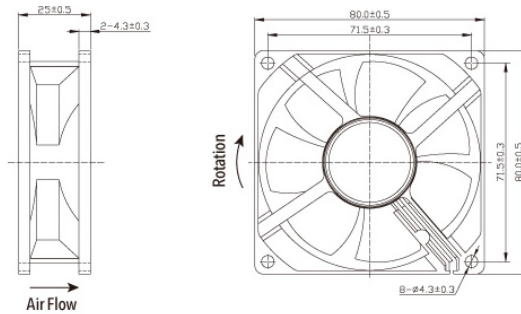DIMENSION (mm)


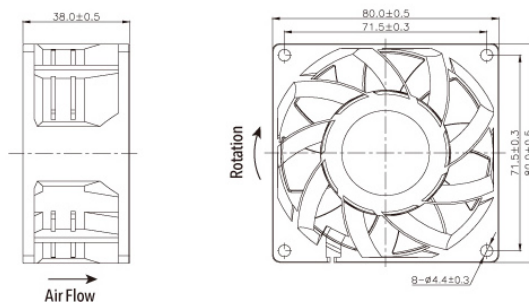
Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE8025HB	110/240	0.10/0.05	50/60	90-265	5	3200	3.8	35.2	32
LKE8025MX	110/240	0.08/0.04			4	2800	2.9	31.2	25
LKE8025LX	110/240	0.06/0.03			3	2400	2.2	26.3	20


UP TO
IP42
UK
CA
CE
RoHS
COMPLIANT

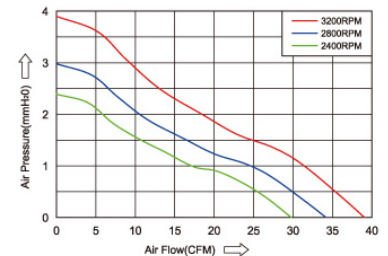-10 +70
°C

80x80x38mm LKE8038


Bearings: Ball bearings
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 140g

DIMENSION (mm)


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE8038HB	110/240	0.12/0.06	50/60	98-265	6	3500	7.1	44.2	39
LKE8038MB	110/240	0.08/0.04			4	3000	4.8	36.3	33
LKE8038LB	110/240	0.06/0.03			3	2500	3.2	29.7	29


UP TO
IP42
UK
CA
CE
RoHS
COMPLIANT

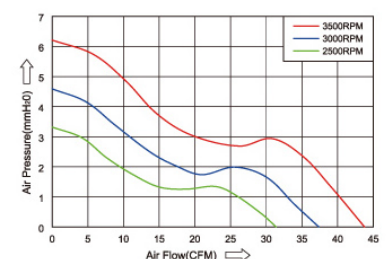-10 +70
°C


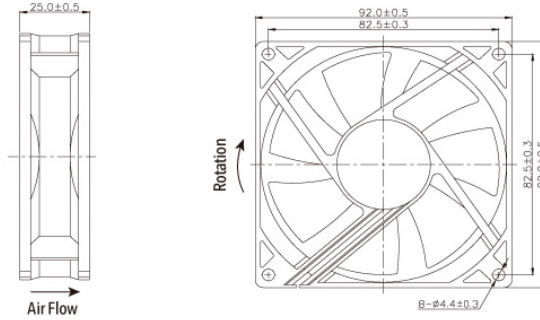
LKE9225 92x92x25mm




Bearings: Sleeve or ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 85g

DIMENSION (mm)



UP TO IP42 UK CA CE RoHS COMPLIANT -10 +70 °C

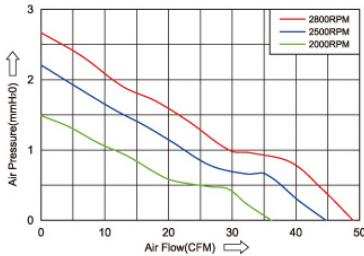

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE9225HB	110/240	0.12/0.06	50/60	98-265	6	2800	2.7	42.1	27
LKE9225MX	110/240	0.10/0.05			5	2500	2.2	37.2	24
LKE9225LX	110/240	0.06/0.03			3	2000	1.5	30.1	19


LKE9238 92x92x38mm




Bearings: Ball bearings
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 175g

DIMENSION (mm)

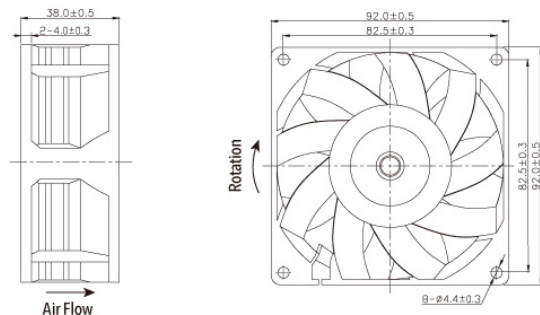

UP TO IP42 UK CA CE RoHS COMPLIANT -10 +70 °C

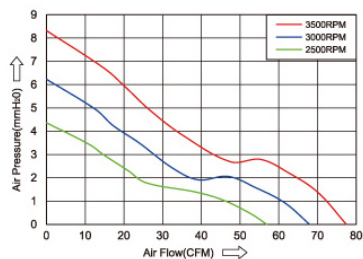

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE9238HX	110/240	0.14/0.07	50/60	90-265	7	3500	8.8	71.0	38
LKE9238MX	110/240	0.10/0.05			5	3000	6.5	60.5	34
LKE9238LX	110/240	0.06/0.03			4	2500	4.5	50.1	31

120x120x25mm LKE12025
Bearings: Sleeve or ball bearing


Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)

Working temperature: -10~70°C


Weight: 140g

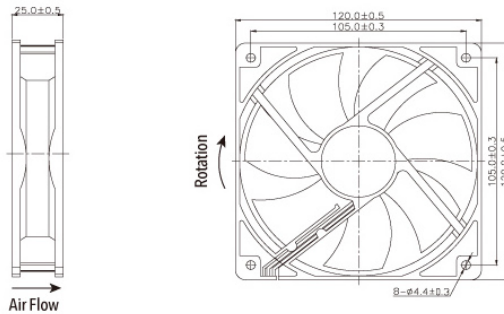DIMENSION (mm)


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE12025HB	110/240	0.16/0.08	50/60	90-265	7	2600	4.5	79.6	33
LKE12025MX	110/240	0.12/0.06			4	2200	3.4	68.0	28
LKE12025LX	110/240	0.10/0.05			3	1800	2.5	55.6	23


UP TO
IP42

UK
CA
CE
RoHS
COMPLIANT

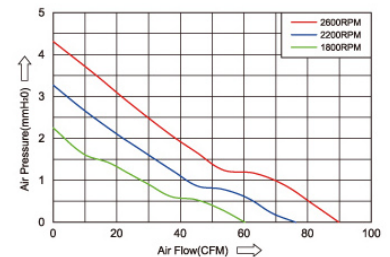-10 +70
°C

120x120x38mm LKE12038-7
Bearings: Ball bearings


Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)

Working temperature: -10~70°C


Weight: 260g

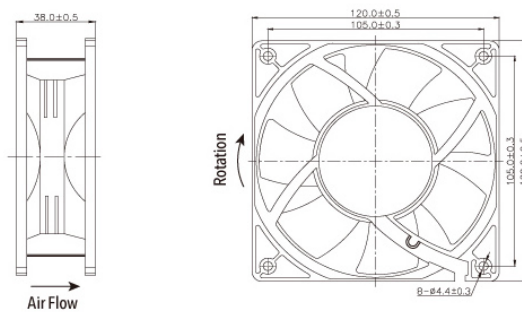DIMENSION (mm)


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE12038DB-7	110/240	0.26/0.13	50/60	90-265	18	4000	18.1	170.6	49
LKE12038HX-7	110/240	0.20/0.10			12	3500	13.9	149.7	46
LKE12038MX-7	110/240	0.16/0.08			8	3000	10.3	128.3	42
LKE12038LX-7	110/240	0.12/0.08			6	2500	7.3	110.7	38


UP TO
IP42

UK
CA
CE
RoHS
COMPLIANT

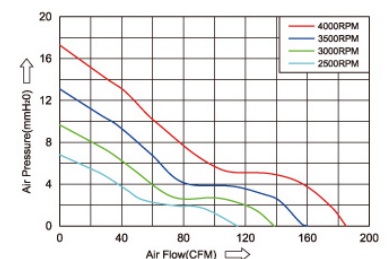-10 +70
°C


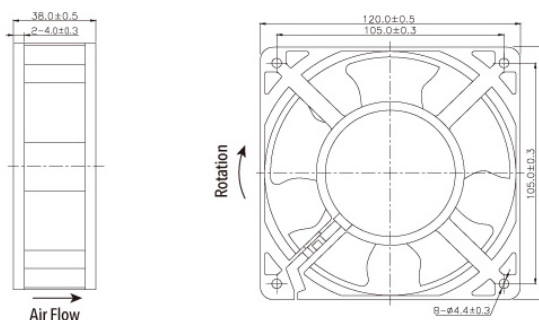
LKE12038-5 120x120x38mm




Bearings: Sleeve or ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 360g

DIMENSION (mm)



Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE12038DB-5	110/240	0.26/0.13	50/60	90-265	18	4000	13.0	125.0	47
LKE12038HX-5	110/240	0.20/0.10			12	3500	10.3	111.0	43
LKE12038MX-5	110/240	0.16/0.08			8	3000	7.8	95.8	38
LKE12038LX-5	110/240	0.12/0.06			6	2500	5.6	79.3	33

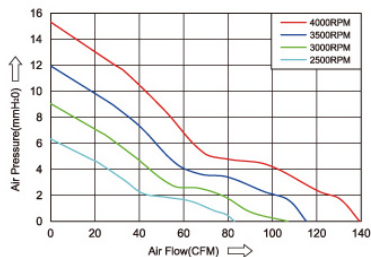


LKE15051 150x150x51mm




Bearings: Sleeve or ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 750g

DIMENSION (mm)

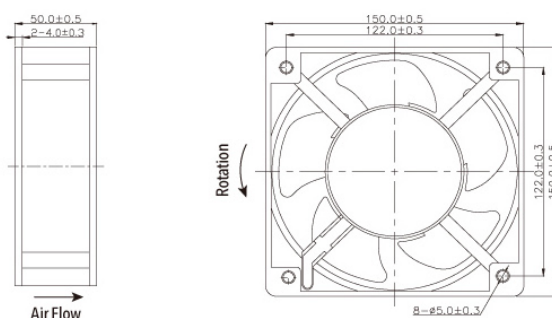

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE15051HX	110/240	0.70/0.35	50/60	90-265	35	3500	20.0	258.1	52
LKE15051MX	110/240	0.50/0.25			22	3000	15.0	219.7	47
LKE15051LX	110/240	0.36/0.18			16	2500	10.6	182.2	42

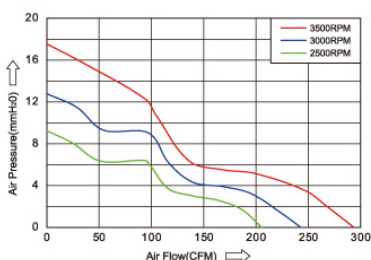

172x150x51mm LKE17251-A
Bearings: Sleeve or ball bearing


Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)

Working temperature: -10~70°C


Weight: 740g

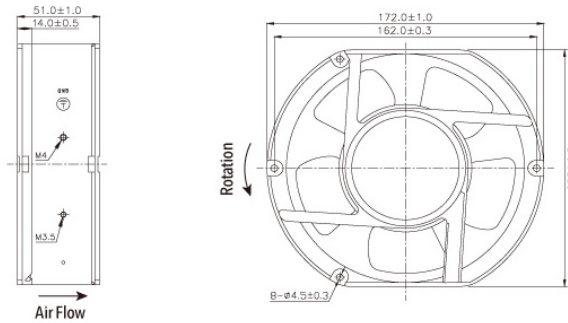DIMENSION (mm)


Model	Rated Voltage	Rated Current	Frequency	Operation Voltage	Power	Speed	Air Pressure	Air Volume	Noise
	(V)	(A)	(Hz)	(VAC)	(W)	(RPM)	(mmH ₂ O)	(CFM)	(dB)
LKE17251HX-A	110/240	0.70/0.35			35	3500	18.7	253.9	52
LKE17251MX-A	110/240	0.50/0.25	50/60	90-265	22	3000	13.5	211.8	46
LKE17251LX-A	110/240	0.36/0.18			16	2500	9.5	177.4	42


UP TO
IP42

UK
CA
CE
RoHS
COMPLIANT

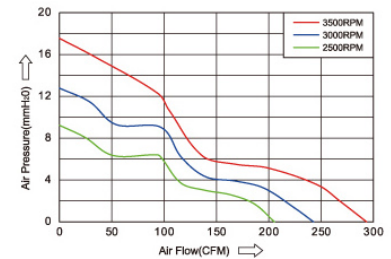-10 +70
°C

172x51mm LKE 17251-B
Bearings: Ball bearing


Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)

Working temperature: -10~70°C


Weight: 760g

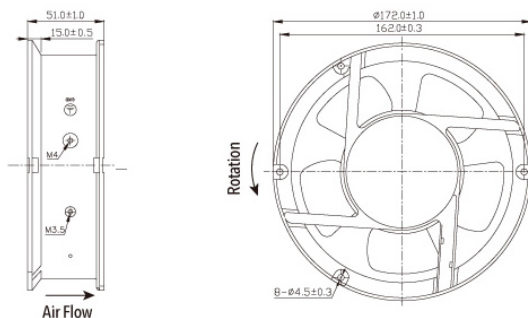DIMENSION (mm)


Model	Rated Voltage	Rated Current	Frequency	Operation Voltage	Power	Speed	Air Pressure	Air Volume	Noise
	(V)	(A)	(Hz)	(VAC)	(W)	(RPM)	(mmH ₂ O)	(CFM)	(dB)
LKE17251HB-B	110/240	0.70/0.35			35	3500	20.2	254.8	48
LKE17251MB-B	110/240	0.50/0.25	50/60	90-265	22	3000	14.9	219.7	44
LKE17251LB-B	110/240	0.36/0.18			15	2500	10.5	179.6	38


UP TO
IP42

UK
CA
CE
RoHS
COMPLIANT

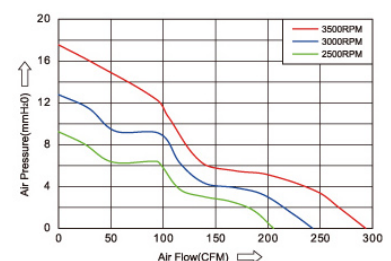-10 +70
°C


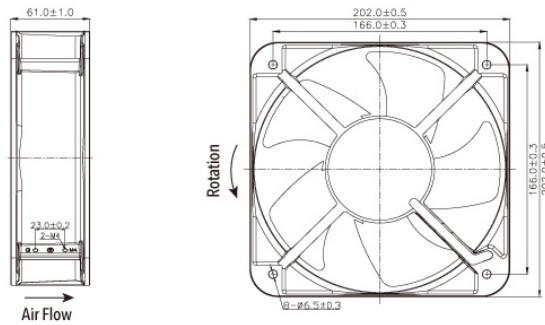
LKE 20060 200x200x60mm




Bearings: Ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 1300g

DIMENSION (mm)



Air Flow

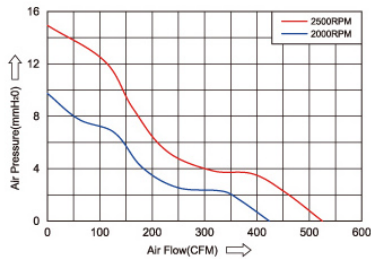

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH2O)	Air Volume (CFM)	Noise (dB)
LKE20060MB	110/240	0.80/0.40	50/60	90-265	45	2500	15.2	493.3	50
LKE20060LB	110/240	0.40/0.20			25	2000	10.0	392.8	44


LKE20572 205x205x72mm




Bearings: gs: Ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 1880g

DIMENSION (mm)

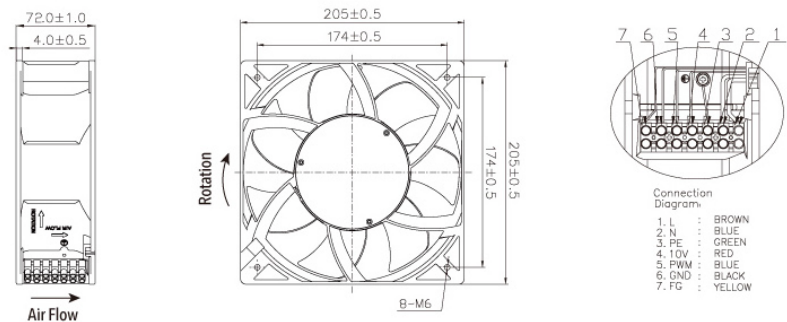

Air Flow

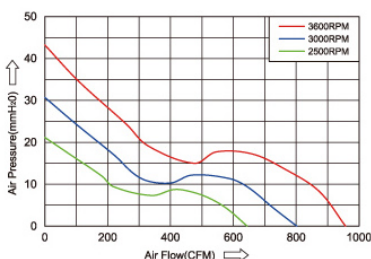


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH2O)	Air Volume (CFM)	Noise (dB)
LKE20572HB	110/240	2.02/1.10	50/60	90-265	145	3600	42.8	851.7	64
LKE20572MB	110/240	1.60/0.80			95	3000	31.7	728.4	59
LKE20572LB	110/240	1.0/0.50			60	2500	21.9	602.7	56

220x60mm LKE22060

Bearings: Ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 1350g

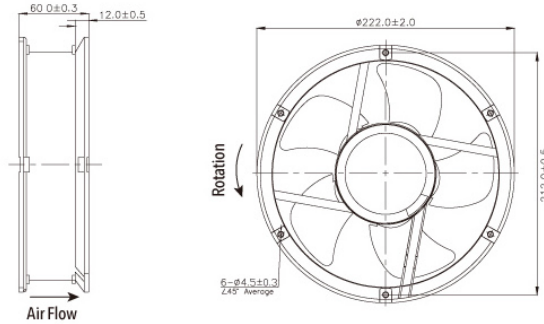DIMENSION (mm)


UP TO
IP42

UK
CA


CE

RoHS
COMPLIANT

-10 ~ +70
°C




Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE22060MB	110/240	0.80/0.40	50/60	90-265	45	2500	14.0	490.8	50
LKE22060LB	110/240	0.40/0.20			25	2000	9.9	396.6	44

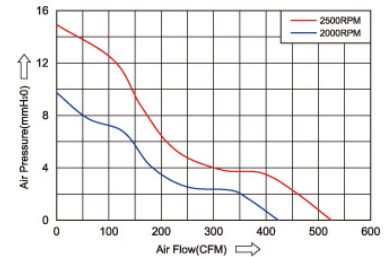
225x225x80mm LKE 22580

Bearings: Ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 2000g

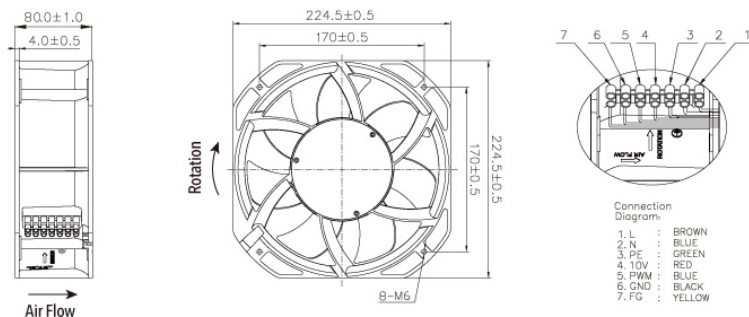DIMENSION (mm)


UP TO
IP42


UK
CA

CE

RoHS
COMPLIANT

-10 ~ +70
°C

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE22580HB	110/240	2.02/1.10	50/60	90-265	145	3600	43.6	869.5	63
LKE22580MB	110/240	1.60/0.80			95	3000	32.2	730.8	58
LKE22580LB	110/240	1.0/0.50			60	2500	22.3	619.2	54

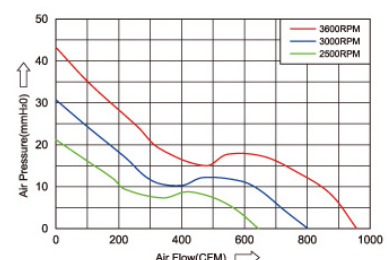




LKE 25489 254x89mm




Bearings: Ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 2100g

DIMENSION (mm)



UP TO **IP42** **UK** **CE** **RoHS** **COMPLIANT** **-10 +70**

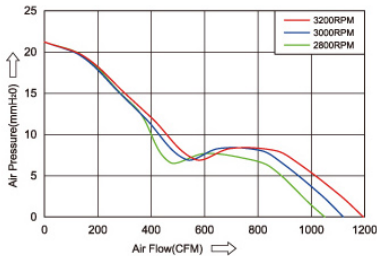

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE25489HB	110/120	2.0/1.10	50/60	90-135	145	3200	27.1	981.6	60
LKE25489MB	110/120	1.80/0.90			115	2500	24.8	796.7	55
LKE25489LB	110/120	1.60/0.80			110	2000	15.8	628.3	48
LKE25489H2B	220/240	1.10	50/60	190-265	145	3200	27.1	981.6	60
LKE25489M2B	220/240	0.90			115	2500	24.8	796.7	55
LKE25489L2B	220/240	0.80			100	2000	15.8	628.3	48




LKE28080 280x280x80mm




Bearings: Ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 2400g

DIMENSION (mm)



UP TO **IP42** **UK** **CE** **RoHS** **COMPLIANT** **-10 +70**

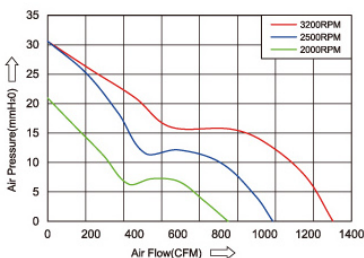

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE28080HB	110/240	2.0/4.0	50/60	90-265	145	3200	31.6	1225.7	63
LKE28080MB	110/240	1.40/0.70			75	2500	31.6	994.6	58
LKE28080LB	110/240	1.0/0.50			45	2000	21.7	790.1	54